

S P E C I F I C A T I O N S

SMD TYPE SIDE VIEW WHITE LED

Model : AS426TWPE1

Alti-semiconductor Co., Ltd.

90-1, Bongmyung-Ri, Namsa-Myun, Cheoin-Gu, Yongin-City, Gyeonggi-Do, Korea 449-882

Tel. : +82 - 31 - 339 - 6400 Fax. : +82 - 31 - 339 - 7651

[http : //www.alti-e.co.kr](http://www.alti-e.co.kr)

1. General Description


(1) Features

- Package Size - $2.8 \times 1.2 \times 0.8(t)$ mm
- White Emission Package (Side View)


(2) Applications

- Mobile phone , PDA , Indicator , Backlighting etc.

(3) Outline Dimensions

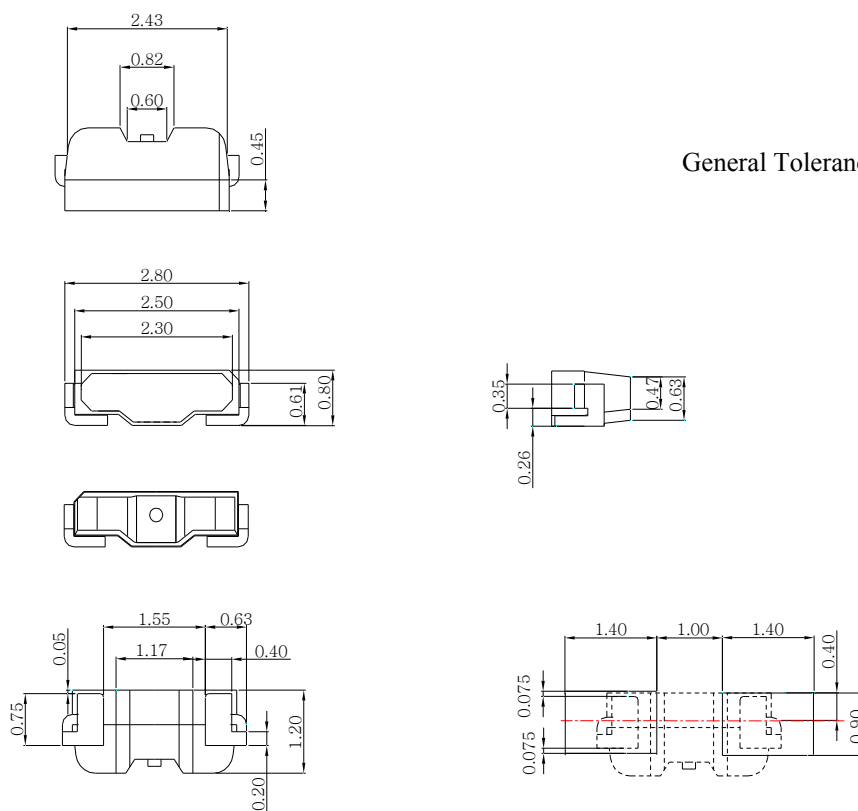

(4) Material Construction

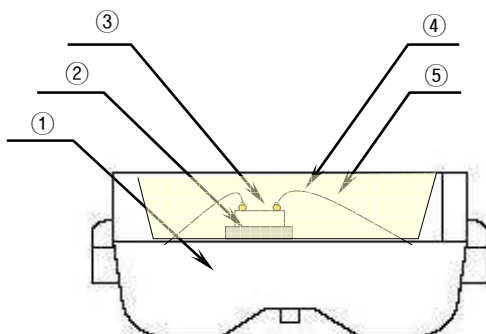

No.	Items	Material
①	Lead Frame	PPA
②	Paste	Resin
③	LED Chip	InGaN/Al ₂ O ₃
④	Gold Wire	Au
⑤	Mold Epoxy	Silicone + Phosphor

2. Specifications

(1) Absolute maximum ratings

Parameter	Symbol	Absolute maximum rating	Unit
Power Dissipation	P_D	102	mW
Forward Current	I_F	30	mA
Peak Pulse Current ⁽¹⁾	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{OPR}	-30 to +80	°C
Storage Temperature	T_{STG}	-40 to +100	°C

Notes (1) Duty ratio = 1/10, pulse with = 10msec

(2) Initial Electrical/Optical Characteristics

($T_a=25^\circ\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V _F	I _F = 20mA	2.8	3.1	-	V
Reverse Current	I _R	V _R = 5V	-	-	10	μA
Luminous Intensity ⁽¹⁾⁽²⁾	I _V	I _F = 20mA	1,500	1,750	-	mcd
Chromaticity Coordinate ⁽³⁾	Cx	I _F = 20mA	0.265	0.288	-	-
	Cy		0.231	0.278	-	-
Radiation Angle	Δθ	I _F = 20mA	X - X : 120deg.			°
			Y - Y : 118deg.			

notes (1) Luminous Intensity measuring equipment : CAS140B(Instrument system)

(2) Luminous Intensity Measurement allowance is $\pm 5\%$

(3) The coordinate refer to CIE 1931 chromaticity diagram.

(3) Characteristics Rank

■ Forward voltage & Luminous intensity rank

($T_a=25^\circ\text{C}$)

Parameter	Symbol	Condition	Rank	Min.	Max.	Unit
Forward Voltage	V_F	$I_F = 20\text{mA}$	Z30	3.0	3.4	V
Luminous Intensity	I_V	$I_F = 20\text{mA}$	S15H	1,500	1,600	mcd
			S16H	1,600	1,700	
			S17H	1,700	1,800	
			S18H	1,800	1,900	
			S19H	1,900	2,000	
			S20H	2,000	2,100	
			S21H	2,100	2,200	

■ Color Rank : The red box is only!

($I_F=20\text{mA}$, $T_a=25^\circ\text{C}$)

	A1			
Cx	0.2600	0.2648	0.2685	0.2640
Cy	0.2460	0.2538	0.2495	0.2420

	A2			
Cx	0.2685	0.2640	0.2680	0.2723
Cy	0.2495	0.2420	0.2380	0.2453

	A3			
Cx	0.2680	0.2723	0.2760	0.2720
Cy	0.2380	0.2453	0.2410	0.2340

	A4			
Cx	0.2760	0.2720	0.2760	0.2798
Cy	0.2410	0.2340	0.2300	0.2368

	A5			
Cx	0.2760	0.2798	0.2835	0.2800
Cy	0.2300	0.2368	0.2325	0.2260

	B1			
Cx	0.2648	0.2695	0.2730	0.2685
Cy	0.2538	0.2615	0.2570	0.2495

	B2			
Cx	0.2730	0.2685	0.2723	0.2765
Cy	0.2570	0.2495	0.2453	0.2525

	B3			
Cx	0.2723	0.2765	0.2800	0.2760
Cy	0.2453	0.2525	0.2480	0.2410

	B4			
Cx	0.2800	0.2760	0.2798	0.2835
Cy	0.2480	0.2410	0.2368	0.2435

	B5			
Cx	0.2798	0.2835	0.2870	0.2835
Cy	0.2368	0.2435	0.2390	0.2325

	C1			
Cx	0.2695	0.2743	0.2775	0.2730
Cy	0.2615	0.2693	0.2645	0.2570

	C2			
Cx	0.2775	0.2730	0.2765	0.2808
Cy	0.2645	0.2570	0.2525	0.2598

	C3			
Cx	0.2765	0.2808	0.2840	0.2800
Cy	0.2525	0.2598	0.2550	0.2480

	C4			
Cx	0.2840	0.2800	0.2835	0.2873
Cy	0.2550	0.2480	0.2435	0.2503

	C5			
Cx	0.2835	0.2873	0.2905	0.2870
Cy	0.2435	0.2503	0.2455	0.2390

	D1			
Cx	0.2743	0.2790	0.2820	0.2775
Cy	0.2693	0.2770	0.2720	0.2645

	D2			
Cx	0.2820	0.2775	0.2808	0.2850
Cy	0.2720	0.2645	0.2598	0.2670

	D3			
Cx	0.2808	0.2850	0.2880	0.2840
Cy	0.2598	0.2670	0.2620	0.2550

	D4			
Cx	0.2880	0.2840	0.2873	0.2910
Cy	0.2620	0.2550	0.2503	0.2570

	D5			
Cx	0.2873	0.2910	0.2940	0.2905
Cy	0.2503	0.2570	0.2520	0.2455

	E1			
Cx	0.2790	0.2837	0.2865	0.2820
Cy	0.2770	0.2847	0.2795	0.2720

	E2			
Cx	0.2865	0.2820	0.2850	0.2893
Cy	0.2795	0.2720	0.2670	0.2743

	E3			
Cx	0.2850	0.2893	0.2920	0.2880
Cy	0.2670	0.2743	0.2690	0.2620

	E4			
Cx	0.2920	0.2880	0.2910	0.2948
Cy	0.2690	0.2620	0.2570	0.2638

	E5			
Cx	0.2910	0.2948	0.2975	0.2940
Cy	0.2570	0.2638	0.2585	0.2520

	F1			
Cx	0.2837	0.2885	0.2910	0.2865
Cy	0.2847	0.2925	0.2870	0.2795

	F2			
Cx	0.2910	0.2865	0.2893	0.2935
Cy	0.2870	0.2795	0.2743	0.2815

	F3			
Cx	0.2893	0.2935	0.2960	0.2920
Cy	0.2743	0.2815	0.2760	0.2690

	F4			
Cx	0.2960	0.2920	0.2948	0.2985
Cy	0.2760	0.2690	0.2638	0.2705

	F5			
Cx	0.2948	0.2985	0.3010	0.2975
Cy	0.2638	0.2705	0.2650	0.2585

	G1			
Cx	0.2885	0.2925	0.2950	0.2910
Cy	0.2925	0.2995	0.2940	0.2870

	G2			
Cx	0.2950	0.2910	0.2935	0.2975
Cy	0.2940	0.2870	0.2815	0.2885

	G3			
Cx	0.2935	0.2975	0.3000	0.2960
Cy	0.2815	0.2885	0.2830	0.2760

	G4			
Cx	0.3000	0.2960	0.2985	0.3025
Cy	0.2830	0.2760	0.2705	0.2775

	G5			
Cx	0.2985	0.3025	0.3050	0.3010
Cy	0.2705	0.2775	0.2720	0.2650

	H1			
Cx	0.2925	0.2965	0.2990	0.2950
Cy	0.2995	0.3065	0.3010	0.2940

	H2			
Cx	0.2990	0.2950	0.2975	0.3015
Cy	0.3010	0.2940	0.2885	0.2955

	H3			
Cx	0.2975	0.3015	0.3040	0.3000
Cy	0.2885	0.2955	0.2900	0.2830

	H4			
Cx	0.3040	0.3000	0.3025	0.3065
Cy	0.2900	0.2830	0.2775	0.2845

	H5			
Cx	0.3025	0.3065	0.3090	0.3050
Cy	0.2775	0.2845	0.2790	0.2720

	I1			
Cx	0.2965	0.3005	0.3030	0.2990
Cy	0.3065	0.3135	0.3080	0.3010

	I2			
Cx	0.3030	0.2990	0.3015	0.3055
Cy	0.3080	0.3010	0.2955	0.3025

	I3			
Cx	0.3015	0.3055	0.3080	0.3040
Cy	0.2955	0.3025	0.2970	0.2900

	I4			
Cx	0.3080	0.3040	0.3065	0.3105
Cy	0.2970	0.2900	0.2845	0.2915

	I5			
Cx	0.3065	0.3105	0.3130	0.3090
Cy	0.2845	0.2915	0.2860	0.2790

	J1			
Cx	0.3005	0.3045	0.3070	0.3030
Cy	0.3135	0.3205	0.3150	0.3080

	J2			
Cx	0.3070	0.3030	0.3055	0.3095
Cy	0.3150	0.3080	0.3025	0.3095

	J3			
Cx	0.3055	0.3095	0.3120	0.3080
Cy	0.3025	0.3095	0.3040	0.2970

	J4			
Cx	0.3120	0.3080	0.3105	0.3145
Cy	0.3040	0.2970	0.2915	0.2985

	J5			
Cx	0.3105	0.3145	0.3170	0.3130
Cy	0.2915	0.2985	0.2930	0.2860

	K1			
Cx	0.3045	0.3085	0.3110	0.3070
Cy	0.3205	0.3275	0.3220	0.3150

	K2			
Cx	0.3070	0.3110	0.3135	0.3095
Cy	0.3150	0.3220	0.3165	0.3095

	K3			
Cx	0.3095	0.3135	0.3160	0.3120
Cy	0.3095	0.3165	0.3110	0.3040

	K4			
Cx	0.3120	0.3160	0.3185	0.3145
Cy	0.3040	0.3110	0.3055	0.2985

	K5			
Cx	0.3145	0.3185	0.3210	0.3170
Cy	0.2985	0.3055	0.3000	0.2930

	L1			
Cx	0.3085	0.3125	0.3150	0.3110
Cy	0.3275	0.3345	0.3290	0.3220

	L2			
Cx	0.3110	0.3150	0.3175	0.3135
Cy	0.3220	0.3290	0.3235	0.3165


	L3			
Cx	0.3135	0.3175	0.3200	0.3160
Cy	0.3165	0.3235	0.3180	0.3100

	L4			
Cx	0.3160	0.3200	0.3225	0.3185
Cy	0.3110	0.3180	0.3125	0.3055

	L5			
Cx	0.3185	0.3225	0.3250	0.3210
Cy	0.3055	0.3125	0.3070	0.3000

Notes (1) Color coordinates measurement allowance is ± 0.01 .

■ Chromaticity Diagram

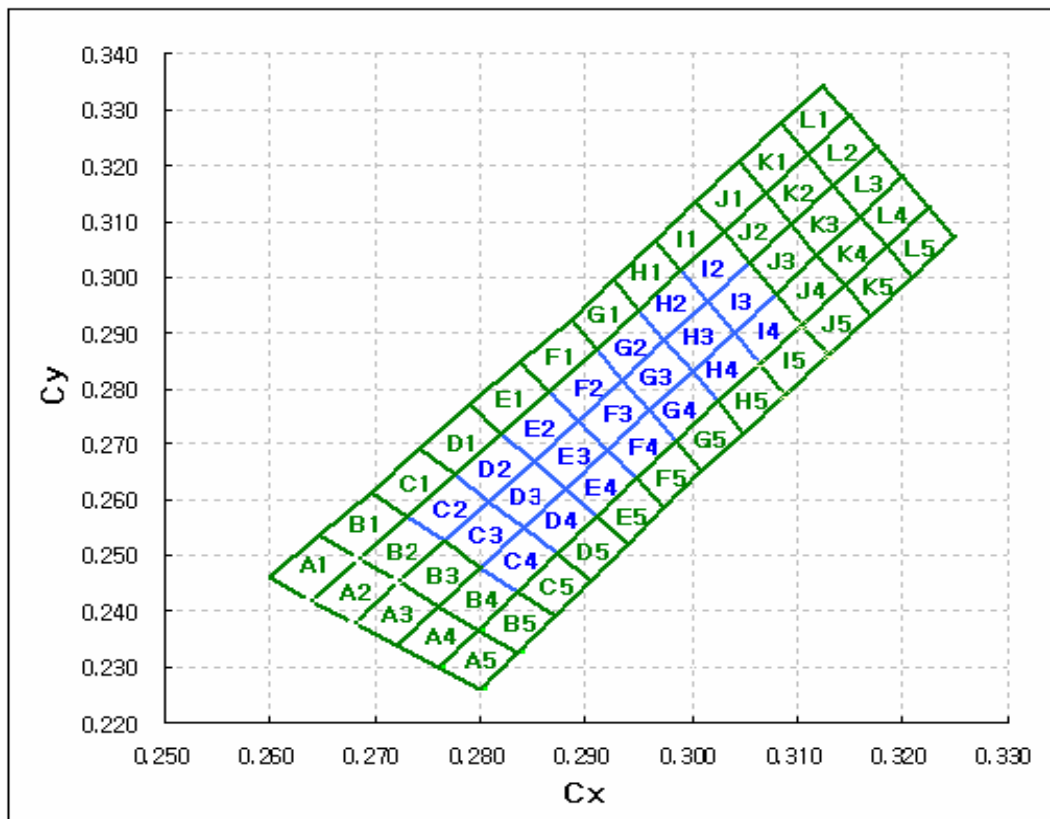

3. Rank

* The rank inscription is composed of the follow method.

Ex.) S15H C2S Z30

→ $V_F : 3.0 \sim 3.4 \text{ V}$


→ Cx, Cy

→ $I_v : 1,500 \sim 1,600 \text{ mcd}$


- S : Used 4 rank in one rank
- D : Used 2 vertical rank in one rank
- R : Used 2 horizontal rank in one rank

※ Ex) B3S = B3,B4,C3,C4
 B3D = B3,B4
 B3R = B3,C3


4. Characteristics Diagrams

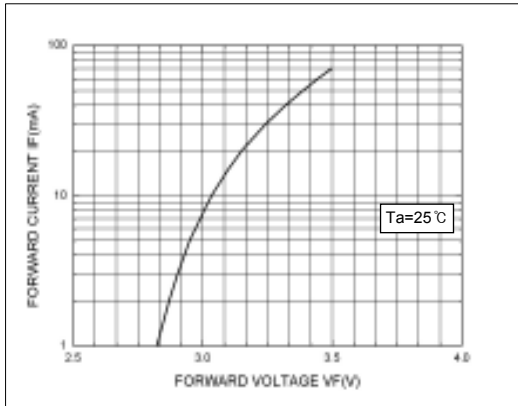


Forward Current vs Forward Voltage

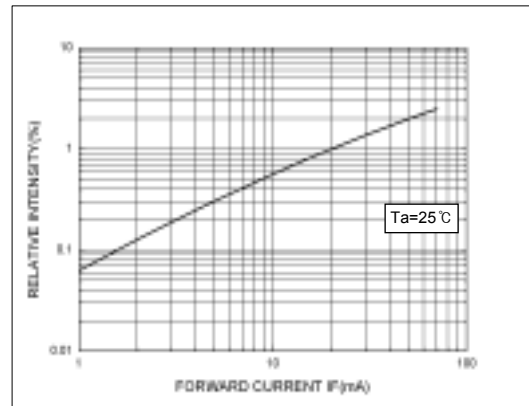


Relative Luminous Intensity vs Forward Current

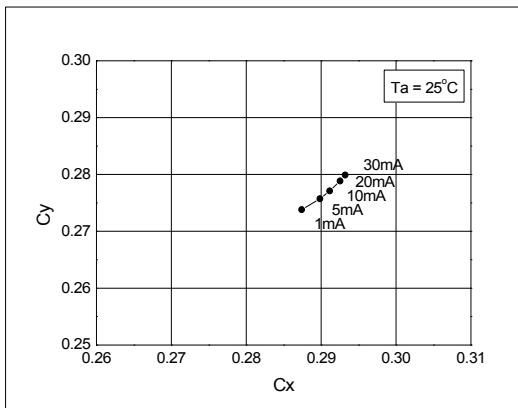


Forward Current vs Chromaticity Diagram

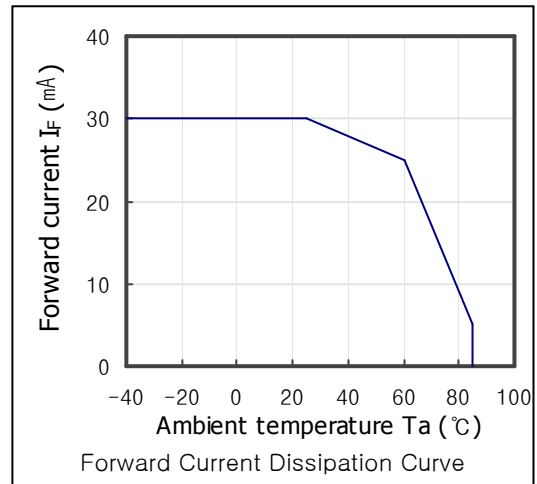

Forward Current Dissipation Curve

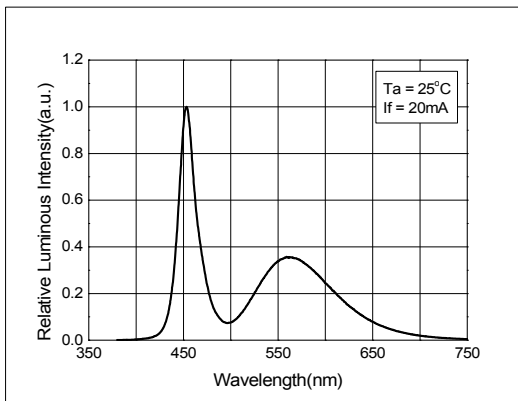

Relative Spectral Emission

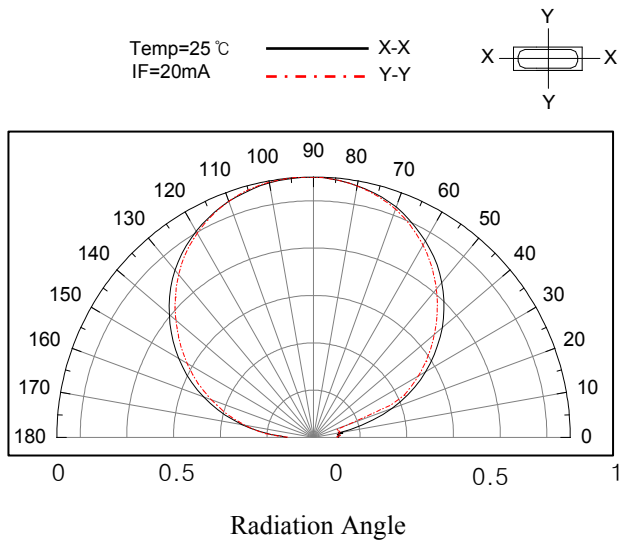

5. Results of Reliability Tests

(1) Test Items and Results

Item	Test Condition	Notes	No. of Damaged
Temperature Cycle	-40℃ ~25℃ ~100℃ ~25℃ (30min~5min~30min~5min)	100Cycle	0/45
Steady State Operating Life	T _a = 25℃, I _F = 20mA	1000hrs.	0/45
Steady State Operating Life of High Temperature	T _a = 85℃, I _F = 5mA	1000hrs	0/45
Steady State Operating Life of High Humidity Heat	T _a = 60℃, RH = 90%, I _F = 15mA	1000hrs	0/45
Steady State Operating Life of Low Temperature	T _a = -30℃, I _F = 20mA	1000hrs	0/45
High Temperature Storage	T _a = 100℃	1000hrs.	0/45
High Temperature & Humidity Storage	T _a = 60℃, RH = 90%	1000hrs.	0/45
Low Temperature Storage	T _a = -40℃	1000hrs.	0/45
Resistance to Soldering Heat	T _{max} =260℃, 10sec (Pre treatment 30℃, 70%, 168hrs)	2 time	0/45

(2) Criteria for Judging the Damage

Parameter	Symbol	Condition	Criteria for Judgement	
			Min.	Max.
Forward Voltage	V _F	I _F = 20mA	-	U.S.L. ⁽¹⁾ * 1.2
Luminous Intensity	I _v	I _F = 20mA	L.S.L. ⁽²⁾ * 0.5	-
Reverse Current	I _R	V _R = 5V		10uA

Notes (1) U.S.L. : Upper Specification Level

(2) L.S.L. : Lower Specification Level


6. Soldering Conditions

(1) Recommended Soldering Conditions


Reflow Soldering			Hand Soldering	
	Lead Solder	Lead-Free Solder	Temperature Soldering time	300℃ Max. 3 sec. Max. (one time only)
Pre-Heating	120 ~ 150℃	180 ~ 200℃		
Pre-Heat Time	120sec. Max.	120sec. Max.		
Peak Temperature	240℃ Max.	260℃ Max.		
Soldering Time	5sec. Max.	5sec. Max.		

* After reflow soldering, Rapid cooling should be avoid.

(2) Recommended Reflow Soldering profile

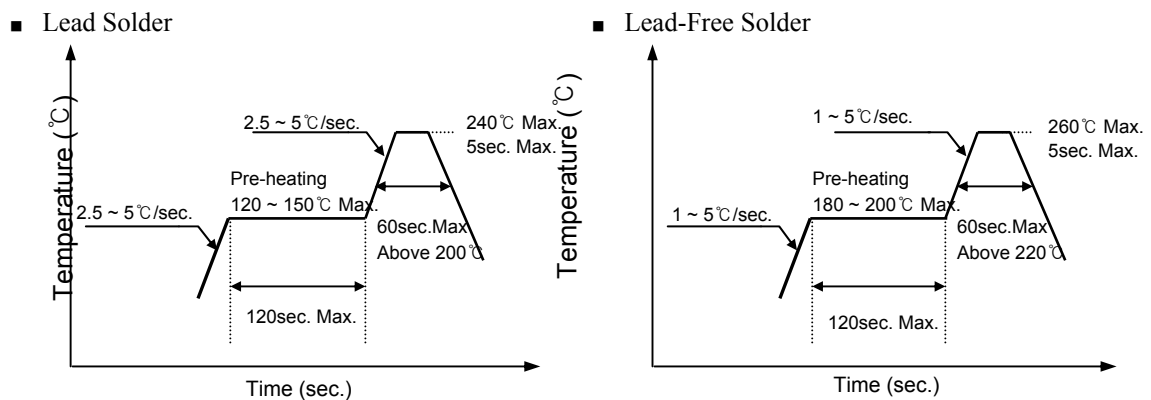

(3) Recommended Soldering Pattern

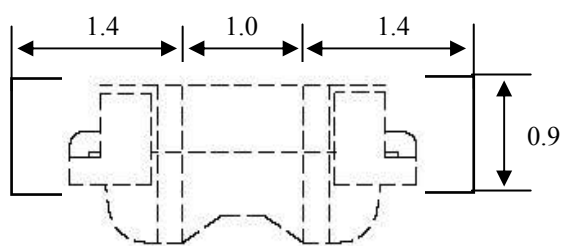

(Unit : mm)


(4) Soldering Cautions

- Reflow soldering should not be done more than two times.
- When soldering, do not put stress on the LEDs during heating.
- After soldering, do not wrap the circuit board.
- The LEDs can be soldered on place using the reflow soldering method.
- Occasionally there is a brightness decrease cause by the influence of heat or ambient atmosphere during air reflow. It is recommend that the user use the nitrogen reflow method.


7. Packing

(1) Carrier Tape & Carrier Reel Dimensions

■ Carrier Tape

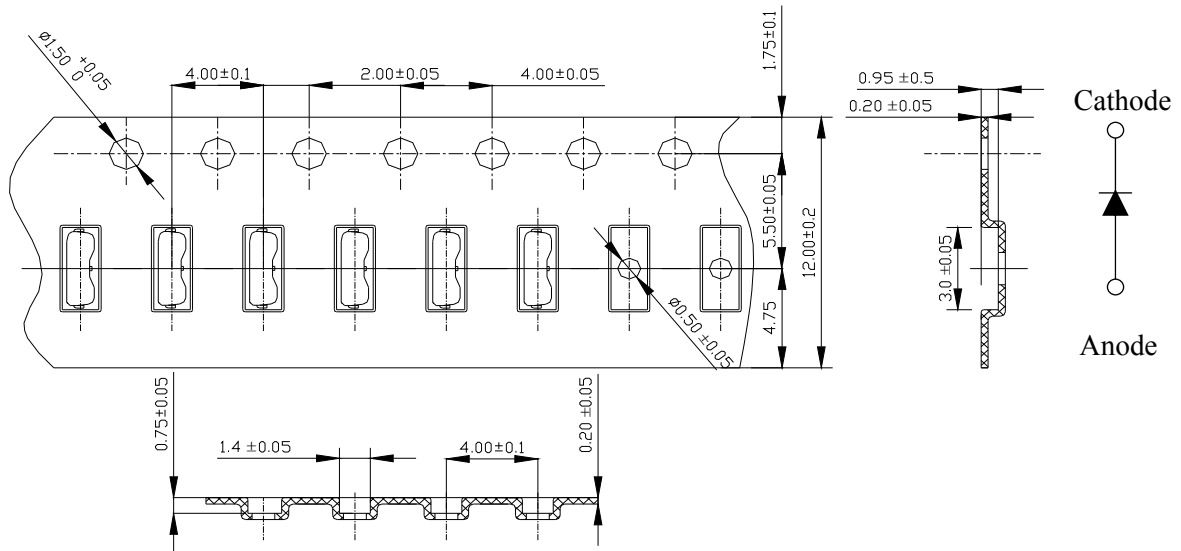

■ Carrier Reel

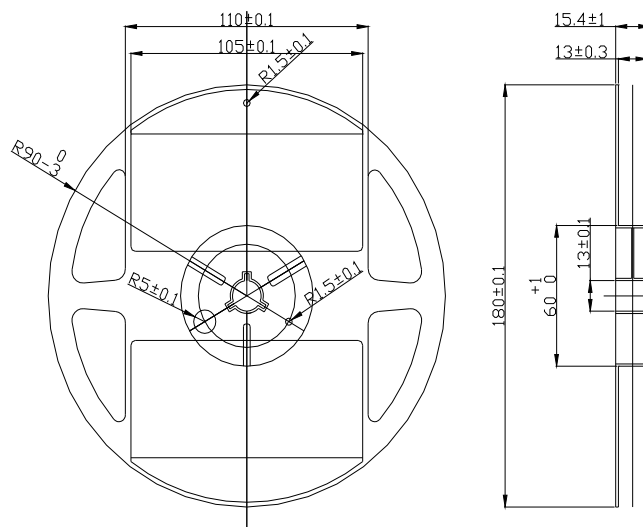

Notes (1) Quantity : 3,500pcs/reel

(2) Adhesion strength of cover tape is 0.1 ~ 0.7N when the cover tape is turned off from the carrier tape.

(2) Packing and Packaging

■ Label


Part No : AS426TWPE1
Pb Free

Lot No : xxxxxx
Q'ty : 3,500 ea
Date : 200x.xx.xx


Rank:S15HC2S-Z30

A070327001
altii-semiconductor


■ Reel



■ Aluminium bag

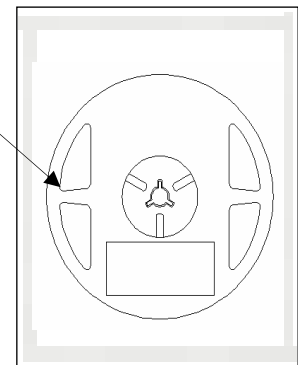

■ Inner Box

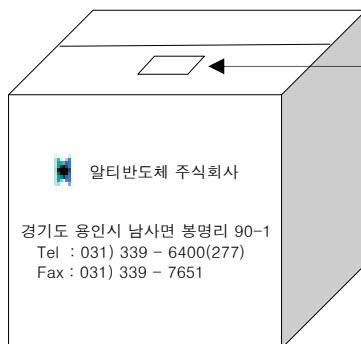

Part No : AS426TWPE1
Pb Free

Q'ty : 28,000 ea
Rank Q'ty

No	Lot No	Rank	Q'ty
1	H07057	S194C2S-Z30	3,500
2	H07057	S194C2S-Z30	3,500
3	H07057	S194C2S-Z30	3,500
4	H07057	S194C2S-Z30	3,500
5	H07057	S194C2S-Z30	3,500
6	H07057	S194C2S-Z30	3,500
7	H07057	S194C2S-Z30	3,500
8	H07057	S194C2S-Z30	3,500

B070723003

altii-semiconductor



■ Outer Box



Box List
Pb Free

Q'ty : 224,000
Part NO

NO	Part No	Rank	Q'ty
1	AS426TWPE1	S194C2S-Z30	224,000

L070723001

altii-semiconductor

Box Type	Inner Box	Outer Box	
		Medium	Large
Max. Packing Q'ty(pcs)	28,000	112,000	224,000

(1) The carrier tape wound on the Reel are placed into an ESD protected pack with a silicagel and sealed by the thermal pressure sealer. Then this sealed pack is packaged in a cardboard box.

8. Precaution

(1) Static Electricity

These LEDs are highly susceptible to static electricity or surge voltage. So a wrist strap or an anti-electrostatic glove necessarily be used when handling the LEDs. Do not use the equipment that surge voltage is came into existence.

All devices and equipment that measure or mount the LEDs must be properly grounded.

After being assembled LEDs, it should be ascertained a electrical characteristic whether that are damaged by static electricity or not. It is easy to find the damaged LEDs by a light-on or VF test at forward a below 1mA current.

(2) Packing

The moisture that is absorbed into the LED products may cause a badness and damage to the optical characteristics of the LEDs. Therefore the moisture barrier aluminum bag is used to keep moisture in the packing. And a silicagel is inserted into a moisture barrier aluminum bag that sealed by the thermal pressure sealer.

(3) Cleaning

It is recommended that isopropyl alcohol(IPA) be used as a solvent for cleaning the LEDs.

Do not clean the LEDs by the ultrasonic. When it use other solvents or is absolutely necessary ultrasonic, before cleaning, a pre-test should be done to confirm whether the LEDs are any damaged or not

(4) Storage

In order to avoid the absorption of moisture, it is recommended to store LEDs in the moisture barrier aluminum bag is not opened.

Storage condition before opening the packing :

Temperature : below 30℃

Humidity : 90%RH max

The LEDs should be used within a year.

Storage condition after opening the packing :

Temperature : below 30℃

Humidity : 60%RH max

After opening the packing, the LEDs should be used within 168 hours(7days). If unused LEDs remain, they should be stored in the place kept away moisture.

If the LEDs have exceeded the above storage time, it should be used after to bake using the following conditions.

Baking condition : 60±5℃, more than 24 hours

(5) Pick and Place

It should be avoided to rub or scratch the surface of resin by any hard material. It is possible that the LEDs are damaged to the optical characteristics.

(6) Heat

The LEDs are products that are generated heat. Please consider the heat generation of the LED when it is designed the PCB. After considering the ambient temperature and the heat generation of LEDs, the operating current should be decided

(7) Others

If the forward or reverse voltage which exceeds the absolute maximum rating is applied to the LEDs, that will cause the damage to the LEDs. It is possible that the damaged LEDs do not light on at the low current.

Be careful not to look the LEDs that the output power is strongly increased in the face. It is possible that eyesight has been getting weaker.

This specifications of the product may be revised without notice.